

COMMUNICATION DRIVER LIBRARY VERSION 12.1

VTScada supports most standard and many proprietary I/O protocols included in the base price of VTScada. If you don't see a driver you need, we can create it for you.

New – OCPP, Toyopuc, Delta, Honeywell Mercury, Mitsubishi, Rockwell

Updated – Enron Modbus, Modbus Compatible Device, SNMP

NATIVE DRIVER PROTOCOLS

TAG TYPE	PROTOCOL	EXAMPLE DEVICE	native Serial	DIAL UP MODEM	NATIVE TCP/IP	TCP/IP TUNNEL	NATIVE UDP/IP	UDP/IP TUNNELED	VIRTUAL PLC	CONNECTION	MORE INFO
Allen Bradley DF1 Compatible	Allen Bradley DF1	PLC2, PLC3, PLC5, SLC500	х	х		Х		х	Х	DH/DH+	DH/DH+ requires interface hardware. Supports Virtual PLC in PLC-2 mode only.
PLC/RTU	Allen Bradley PCCC	PLC5, SLC500			х						. 20 20 2
BACnet Driver	BACnet	BACnet Compliant Devices					х				
Bristol BSAP/IBP Drive	Bristol BSAP	Bristol 33xx Series RTUs, ControWave RTUs	x	х		х		х			Separately available from Trihedral.
& Network	Bristol IBP	Bristol ControWave RTUs					Х				
RENAMED - CIP/ENIP Device											New in 12.1 - Enhanced and renamed as the Rockwell Driver (see below)
Calamp Diagnostic	Calamp Diagnostic Driver Protocol	Calamp Integra, Integra TR, Viper and Phantom radios	х		х	Х					
Campbell Scientific Array	Campbell Scientific Array Protocol	CR10X and CR510 Data Loggers using array OS	X	х		Х		х			
Campbell Scientific Pakbus	Campbell Scientific Pakbus	CR200, CR800, CR850, CR1000, CR3000, CR5000 Data Loggers	Х	Х	Х	х		х			Security features for native TCP/IP not implemented.
Cat 5MX	MX5	CAT Electronic Engine Controllers and CAT Generator Set Controllers	х								Requires a Customer Communication Module
DDE Client	DDE (Dynamic Data Exchange)	MS Excel								DDE	Can act as DDE Client or Server.
Data Flow Systems RTU	DFS Protocol	Data Flow Systems® RTUs	Х			Х		Х			Also works with DFS NIM.
NEW - Delta Driver	Modbus	Delta's Modbus PLCs & VFDs.	Х	Х	Х	Х					Supports multiple PLC port connections.
Koyo DirectNET	Direct Net	PLC Direct® DL Family of PLCs	Х	Х		Х		X			
DNP3 Compatible RTU	DNP 3.0	DNP 3.0 Compliant Devices	Х	Х	х	Х	х	х			
UPDATED - Enron Modbus RTU	Enron Modbus®	Enron Modbus Compliant Devices	Х	Х	Х	Х		х			New in 12.1 - Now supports multiple TCP/IP connections for supported devices.
Fisher ROC	Fisher® ROC	ROC800, 800L, FloBoss™ 103, 107	Х	Х	Х	Х		X			
GE Series 90	General Electric® SNP, SNPX	GE Series 1 PLC, Series 5 PLC, Series 6 PLC, Series 90 PLC	х								No direct support for use on Ethernet to Serial converters.
	General Electric® SRTP	Series 90 PLC, RX3i PLC			х						
NEW - Honeywell Mercury	Mercury Serial Data	Mini-AT	Х	х	Х						Requires special licensing and configuration. Contact Trihedral for help. Currently not available with free versions
IEC 60870-5	IEC-60870- 104	RTUs & PLCs from Various Manufacturers			х				х		
JSON/XML	JSON	JSON Compliant Websites and Devices			x						Supports JSON retrieved over HTTP and HTTPS. Also supports XML (Read only).

TAG TYPE	PROTOCOL	EXAMPLE DEVICE	native Serial	DIAL UP MODEM	NATIVE TCP/IP	TCP/IP TUNNEL	native UDP/IP	udp/ip Tunneled	Virtual PLC	CONNECTION	MORE INFO
MDS Diagnostic	MDS Diagnostic Driver Protocol	MDS Radios	Х								
NEW - Mitsubishi	3E and 4E	Mitsubishi iQR PLC			Х		Х				Supports multiple PLC port connections.
	Modbus ASCII	Modbus ASCII Compliant Devices	х	Х		х		Х	х		Modbus PLUS requires additional interface hardware.
UPDATED - Modbus	Modbus PLUS	Modbus Plus Compliant Devices								Modbus Plus	New in 12.1 - I/O reads can ru on a separate core. Supports 16-bit addresses and multiple
Compatible Device	Modbus RTU	Modbus RTU Compliant Devices	Х	Х		Х		X	Х		TCP/IP port connections between a driver instance and
	Open Modbus/TCP	Open Modbus/TCP Compliant Devices	Х	Х	Х	Х	Х	Х	Х		the RTU.
Motorola ACE RTU	Modbus, M- OPC, DNP3, IEC	Moscad RTU Family, ACE Family			Х						Requires MDLC IP Gateway device.
Motorola IP Gateway	Motorola® Ace Gateway API	Motorola ACE RTUs			Х						Supports RTU redundancy within the IP Gateway device
MQTT Client Driver	MQTT 3.1.1				X						V12. MQTT 3.1.1. Subscriber/Publisher. Requires 3 rd -party MQTT server (a.k.a. Broker).
	SparkPlug B				Х						
NMEA 0183	NMEA 0183	Serial GPS	Х	Х		X		X			Functions as talker and listener.
NEW - OCPP Driver	OCPP 1.6J	For chargers such as Delta AC MAX Smart EV and others			Х					Websockets	Acts as Charge Station Management System. Charger initiate connections to VTScad
Omron FINS Driver	Omron® FINS	CS Series PLC, CJ Series PLC			Х						
Omron Host Link PLC	Omron® Hostlink	C Series PLC, CS Series PLC, CJ Series PLC	Х	Х		Х		х			
OPC DA Client	OPC® DA Client	OPC Servers for Various Products								OPC	Supports hundreds of 3rd party OPC servers.
OPC UA Client	OPC® UA - TCP - Binary 1.04	OPC Servers for Various Products			X	Х					Doesn't use a Port tag. Port handling is built in.
Opto22 Mux Driver	Optomux	Opto 22 Analog & Digital I/O Boards	Х	х		х		х			Separately available from Trihedral.
	Rockwell/Allen Bradley CIP/ENIP	PLC-5 and SLC-500 (routed only) and Micrologix 1100-1500 (routed and direct)			х						Replaces Allen Bradley DF1 for the listed PLCs.
NEW – Rockwell (Formerly CIP/ENIP)	Rockwell/Allen Bradley CIP/ENIP	ControlLogix, CompactLogix and MicroLogix 820/850			х						Enhanced version of the CIP/ENIP Driver.
	Rockwell/Allen Bradley CIP/ENIP	PLC-5, SLC-500, and Micrologix 1100-1500 through Serial or CSP links	X	X		x		x		DH/DH+	Enhanced version of the CIP/ENIP Driver.
NEW - ScanCom	ScanCom (ADEPT)	Barton Scanner 1100	Х	Х							Serial over TCP/IP tested with DigiPort hardware.
Siemens S7 PLC	Siemens® ISO over TCP	S7 Series PLCs			Х						
SNMP Managed Device	Simple Network Management Protocol (SNMP)®	Standardized Protocol for Thousands of Devices						x			
UPDATED - SNMP Agent	SNMP V1 or V2	Allows VTScada to Supply Data to a Networked Device				Х					New in 12.1 - Expanded SNMP V3 support improves security.
SQL Data Query Driver	SQL Data Query (ODBC)	SQL Databases									
TeleBUS	TeleBUS	Control Microsystems SCADAPack RTU Family	х	х	х						Separately available from Trihedral.
Тоуорис	Toyopuc	PC3, PC10			х						
TI505	CAMP	TI505 Controller				х					TI505 controller requires CTI 2572 Ethernet TCP/IP Adapter
Veeder-Root	Veeder-Root Serial Interface	TLS-300, TLS-350, and TLS-350R	Х	Х	Х	Х					





DEVICES THAT HAVE BEEN USED WITH VTSCADA*

MANUFACTURER	MODEL(S)	PROTOCOL	NOTES		
	Variable Speed Drives, AC500 Series PLCs	Modbus			
ABB	Totalflow Family	Enron Modbus			
ADD	Totalflow computers & analyzers using DB2 Serial protocol	ABB Totalflow DB2	Via a third-party driver at an additional cost.		
	AC500 Series PLCs	IEC-60870-104			
	SLC 500, PLC-2, PLC-3, PLC-5, PLC-5-250 (Pyramid Integrator),	DF1	MicroLogix 1400 can also be configured to DNP3.		
Allen-Bradley®	Micrologix, CompactLogix®, ControlLogix®	Ethernet/IP			
	Micro800 Programmable Controllers	Symbolic CIP	Symbolic CIP driver separately available from Trihedral.		
Automation Direct	DL Family of PLCs, Click Family of PLCs, Productivity Family of PLCs	Modbus	VTScada driver allows native DL PLC addressing in our Modbus driver (e.g., V2105, C33, etc).		
Cisco	Catalyst 2950 Series Switches	SNMP			
	Telesafe RTU Family, SCADAPack® RTU Family	Modbus	Supports access to time stamped data recorded by RTUs using the Data Logger (DL) functions.		
O	SCADAPack® RTU Family Using RealFLO®	Enron Modbus	the Bata Logger (BE) tarretons.		
Control Microsystems / Schneider	SCADAPack® RTU Family	DNP3			
	Telesafe RTUs	DF1			
Davicom	DV-Mini, DV-208, DV-216	SNMP			
Digital Control Company (DCC)®	DCC Pump Controllers	Modbus			
Fator	PW9155 UPS	SNMP			
Eaton	Power Xpert Power Meter 2000 Series	Modbus TCP	Contact Trihedral for configuration details.		
	Multi-Core of Duran Condens Hard®	Modbus	Previously branded as MultiTrode® MultiSmart.		
Flygt® (Xylem)	MultiSmart Pump Controller®	DNP3	Previously branded as Multi Frode ² MultiSmart.		
	Flygt XPC2+ Pump Controller	Modbus	Modbus TCP		
Foxboro®	C50 RTU	DNP3			
GE	D20/D200 RTUs	DNP3			
Gridsmart Technologies Inc.	Gridsmart V4	JSON			
Grundfos	CU 362 Devices	Modbus			
orunaioo	CU 352 Devices	Modbus/BACnet	BACnet requires additional converter hardware.		
Modicon / Schneider	Modicon 984 Family of PLCs, Modicon Compact Family of PLCs, Modicon Quantum Family of PLCs, Modicon TSX Family of PLCs	Modbus			
Motorola IP Gateway	Motorola ACE RTUs	Motorola® Ace Gateway API	VTScada supports RTU redundancy within the IP Gateway device.		
MPE®	MPE Duplex Controller	Modbus			
NatCantral	FastNest100	Serial			
NetControl	Fasinest 100	IEC-60870-104			
Phoenix Contact	AXC1050	IEC-60870-104			
Ovarro (Formerly CSE Semaphore)	TBox® RTU	Modbus	Supports to access time stamped data recorded by RTUs using Sample Tables and Chronologies.		
Ovario (i orinicity COL Comaphoto)	TBox® RTU Family Using TFlo®	Enron Modbus			
Power Measurement Ltd.®	ION Series Meters	Modbus			
rower weasurement Ltd.	ION Series Meters	DNP3			
RuggedCom / Siemens	RX1000 Router	SNMP			
Schlumberger®	Q1000 Meters	DNP3			
Schweitzer Engineering Laboratories, Inc (SEL Inc)	SEL-2030 Communications Processor	DNP3			
SIMATIC	TI-505 Controller with 2572 Ethernet TCP/IP Adapter	TI505			
Sixnet®	Micro-Versa TRAC, Sixnet SixTRAC	Modbus			
Surfline 9015	9015	Modbus	With firmware feature enabled.		
Thermo Fisher Scientific	AutoPILOT	Enron Modbus			
Woodward®	easYgen Series, EGCP-3, DTSC, DLSC-2, 723 PLUS, 733, 828	Modbus			





ENTERPRISE DATA SHARING TOOLS


These integrated components for sharing application history and services with third-party platforms are standard in VTScada Development Runtime Licenses.

Name	Protocol	Data	Configuration		
ODBC	ODBC	History, Tag Parameters, Alarm History, Current Alarms	Internet Client Setup. Defined by SQL Queries.		
OPC Server	OPC DA/Classic	Legacy tag values and I/O tags with Publish checked, Report by Exception. Output tags pass through changes and call Set()	OPC Server Setup tag.		
OPC Client	OPC UA/DA	Allows VTScada apps to query live data from an OPC-compliant server (including VTScada apps with configured OPC servers).	OPC Client Setup tag.		
Web Services	HTTP(S)/SOAP	History, Tag Parameters, Alarm History, Current Alarms. Custom interfaces can be added.	Internet Client Setup. Defined by SQL Queries.		
REST	HTTP(S)	History, Tag Parameters, Alarm History, Current Alarms. Custom interfaces can be added.	Internet Client Setup. Defined by SQL Queries.		
Multispeak	HTTP(S)/SOAP	Legacy tag values and I/O tags with Publish checked. Poll for and Report by Exception	Internet Client Setup. Application Properties.		

DRIVER CONNECTION DEFINITIONS

Term	Definition	Example s
Native Serial	Driver supports native serial communication as defined in protocol standard document(s) on PC serial ports using VTScada "Serial Port" tags.	1
Modem	Driver supports native serial communication as defined in protocol standard document(s) over modems defined in the operating system.	2
Native TCP/IP	Driver supports native TCP/IP communication to devices as defined in the protocol standard document(s).	3
TCP/IP Tunnel	Driver supports tunneling of serial protocol via Ethernet connected TCP/IP to serial converters using VTScada "TCP/IP Port" tags.	4
Native UDP/IP	Driver supports native UDP/IP communication to devices as defined in the protocol standard.	3
UDP/IP Tunneled	Driver supports tunneling of serial protocol via Ethernet connected UCP/IP to serial converters using VTScada "UDP/IP Port" tags.	4
Other Connection	Driver supports device or protocol specific interface, or methodology not covered by above definitions (e.g. ODBC).	
Virtual PLC	Driver supports VTScada acting as a memory-mapped PLC or RTU that other devices can read from or write to.	У

DRIVER CONNECTION EXAMPLES

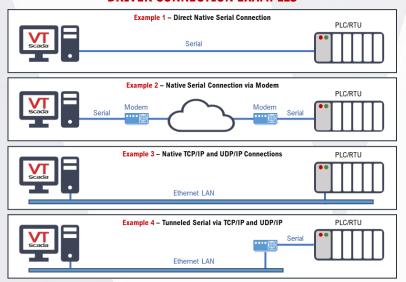

NATIVE POLLING DRIVER

Integrated polling eliminates the need for a master PLC device reducing hardware costs, integration time, and points of failure. VTScada simplifies device communications by automatically organizing scheduled polling cycles and communications channels. Reduce the number of required radios by transmitting multiple protocols on a single communications link. The Polling Driver is a standard component of VTScada Runtime and Development Runtime Licenses.

- Configure any number of polling groups.
- Select 'Fast Polling' rate for specific RTUs.
- Poll by external triggers, on schedule, or on command.
- Enable or disable polling in any polling driver.
- Display min, max, and average values.

EASY TO TRY

Our free license, for industrial and personal applications up to 50 I/O, includes all communication drivers that are part of VTScada Runtime and Development Runtime licenses.

VTScada.com/LIGHT

NEW DRIVER DEVELOPMENT

If you don't see the device or protocol you are looking for, we can create custom drivers to meet your needs. New driver development prices are determined on a case-by-case basis. info@trihedral.com - 1.800.463.2783

Updated: August 7, 2024

^{*} Includes devices we have internally tested and that have been used by one or more customers. Trihedral does not guarantee any of the listed devices.

